



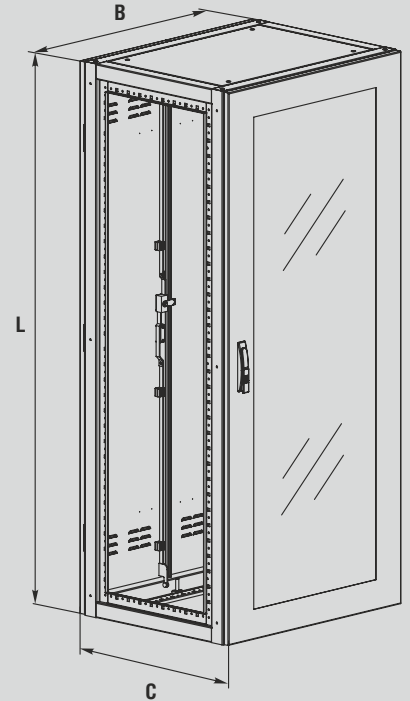

## Power distribution enclosures XLA55

IP  
55

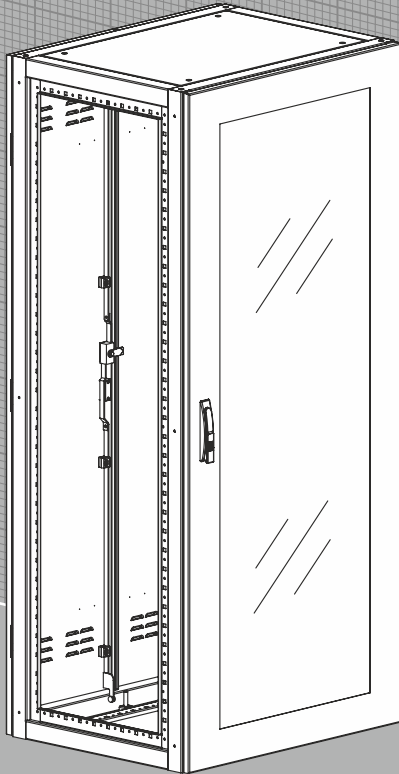

### Technical characteristics

<b>Protection degree:</b>	IP55, IK10
<b>Un, B:</b>	1000
<b>In, A:</b>	2500
<b>Load, kg:</b>	800
<b>Type of construction:</b>	welded framework of steel frames
<b>Material:</b>	framework: sheet steel; door: sheet steel; walls: sheet steel
<b>Surface:</b>	framework, door and walls: RAL 7035 structured powder coating
<b>Sealing:</b>	door, walls, roof panel: all-round foamed-in PU seal
<b>Lock:</b>	3 mm double-bit
<b>Hinge:</b>	mounted with 120° opening
<b>Supply includes:</b>	framework with roof panel, double leaf door with lock, viewing door with lock, back wall, grounding set, key, packing.
<b>Options:</b>	special coloring, special dimensions
<b>Accessories:</b>	detailed information look <b>System Accessories</b>
<b>Drawing:</b>	page №94

Height L, mm	Width B, mm	Depth C, mm	Order No.
1400	800	600	XLA55-1486
1600	800	600	XLA55-1686
1800	800	600	XLA55-1886
1800	800	800	XLA55-1888
1800	1000	600	XLA55-18106
1800	1000	800	XLA55-18108
1800	1200	600	XLA55-18126
1800	1200	800	XLA55-18128
2000	800	600	XLA55-2086
2000	800	800	XLA55-2088
2000	1000	600	XLA55-20106
2000	1000	800	XLA55-20108
2000	1200	400	XLA55-20124
2000	1200	600	XLA55-20126
2000	1200	800	XLA55-20128
2200	800	600	XLA55-2286
2200	800	800	XLA55-2288
2200	1000	600	XLA55-22106
2200	1000	800	XLA55-22108
2200	1200	600	XLA55-22126
2200	1200	800	XLA55-22128

