



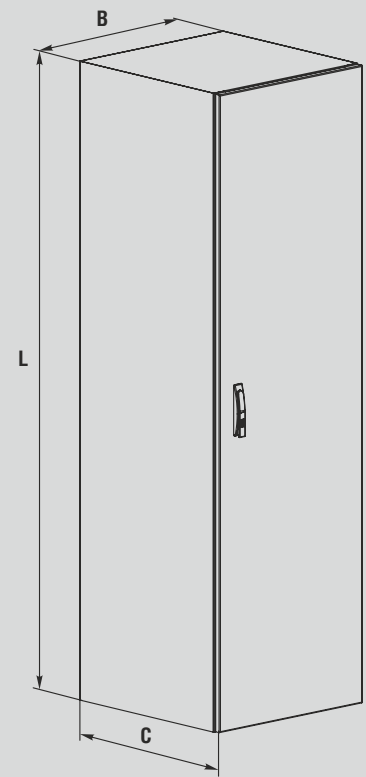

# Power distribution enclosures XM66

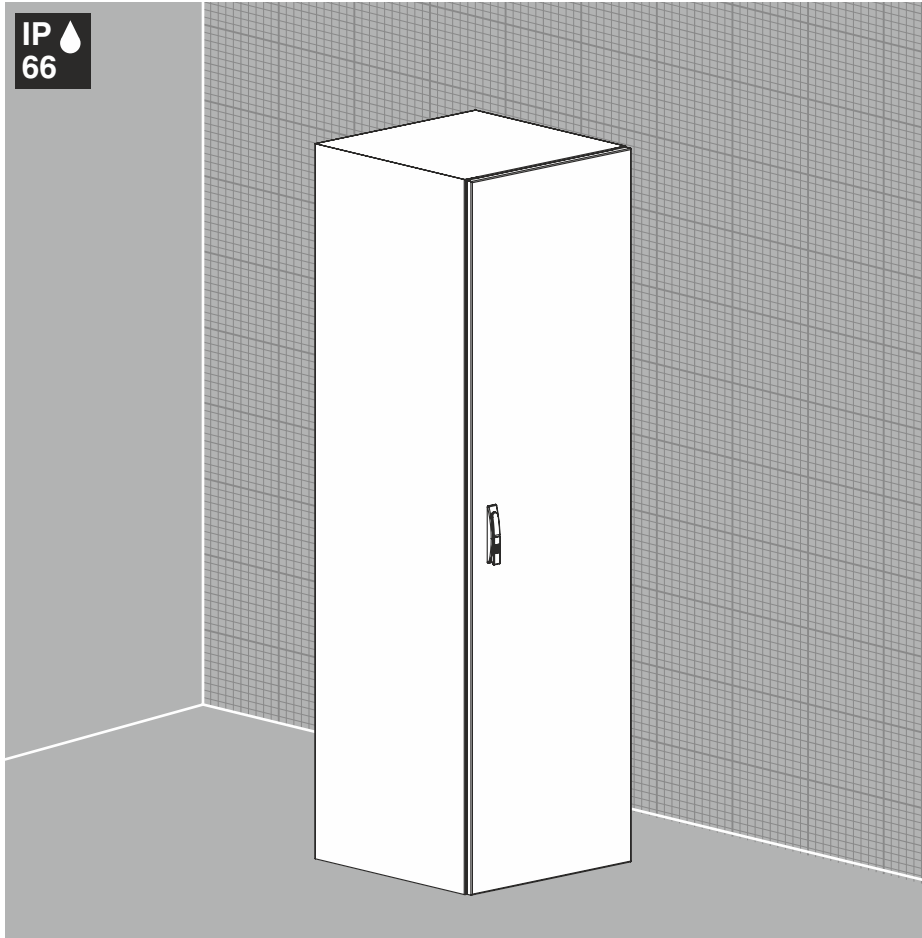

## Technical characteristics

**Protection degree:** IP66, IK10  
**Un, B:** 1000  
**In, A:** 2500  
**Load, kg:** 800  
**Type of construction:** welded enclosure  
**Material:** sheet steel  
**Surface:** RAL 7035 structured powder coating  
**Sealing:** all-round foamed-in PU seal  
**Lock:** 3 mm double-bit  
**Hinge:** mounted with 120° opening.  
**Supply includes:** enclosure, door with lock, bottom protection, grounding set, key, packing. Options: special coloring, special dimensions  
**Accessories:** detailed information look **System Accessories**  
**Drawing:** page №96

| Height L, mm | Width B, mm | Depth C, mm | Order No.        |
|--------------|-------------|-------------|------------------|
| 1400         | 600         | 400         | <b>XM66-1464</b> |
| 1400         | 600         | 600         | <b>XM66-1466</b> |
| 1400         | 800         | 400         | <b>XM66-1484</b> |
| 1400         | 800         | 600         | <b>XM66-1486</b> |
| 1600         | 600         | 400         | <b>XM66-1664</b> |
| 1600         | 600         | 600         | <b>XM66-1666</b> |
| 1600         | 800         | 400         | <b>XM66-1684</b> |
| 1600         | 800         | 600         | <b>XM66-1686</b> |
| 1800         | 600         | 400         | <b>XM66-1864</b> |
| 1800         | 600         | 600         | <b>XM66-1866</b> |
| 1800         | 800         | 400         | <b>XM66-1884</b> |
| 1800         | 800         | 600         | <b>XM66-1886</b> |
| 2000         | 600         | 400         | <b>XM66-2064</b> |
| 2000         | 600         | 600         | <b>XM66-2066</b> |
| 2000         | 800         | 400         | <b>XM66-2084</b> |
| 2000         | 800         | 600         | <b>XM66-2086</b> |

