




Power distribution enclosures XMD55

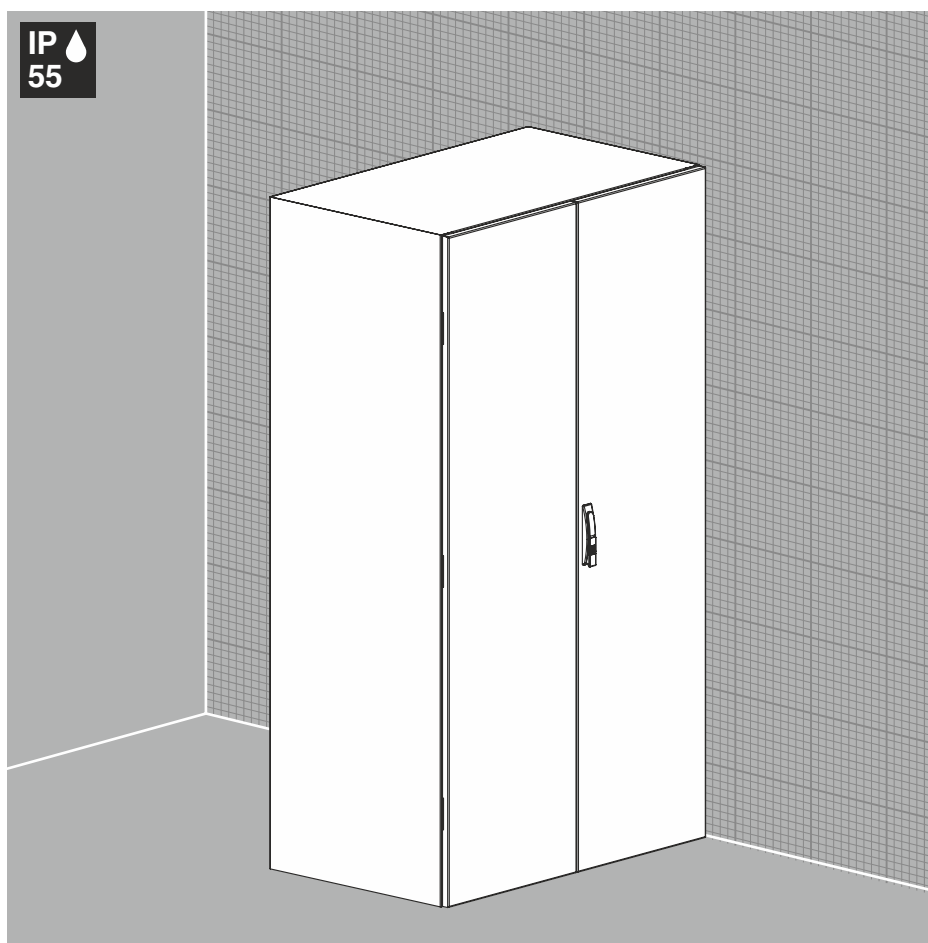

Technical characteristics

| | |
|------------------------------|---|
| Protection degree: | IP55, IK10 |
| Un, B: | 1000 |
| In, A: | 2500 |
| Load, kg: | 800 |
| Type of construction: | welded enclosure |
| Material: | sheet steel |
| Surface: | RAL 7035 structured powder coating |
| Sealing: | all-round foamed-in PU seal |
| Lock: | 3 mm double-bit |
| Hinge: | mounted with 120° opening |
| Supply includes: | enclosure, double leaf door with lock, bottom protection, grounding set, key, packing |
| Options: | special coloring, special dimensions |
| Accessories: | detailed information look System Accessories |
| Drawing: | page N°97 |

| Height L, mm | Width B, mm | Depth C, mm | Order No. |
|--------------|-------------|-------------|-------------|
| 1800 | 1000 | 400 | XMD55-18104 |
| 1800 | 1000 | 600 | XMD55-18106 |
| 2000 | 1000 | 400 | XMD55-20104 |
| 2000 | 1000 | 600 | XMD55-20106 |

