



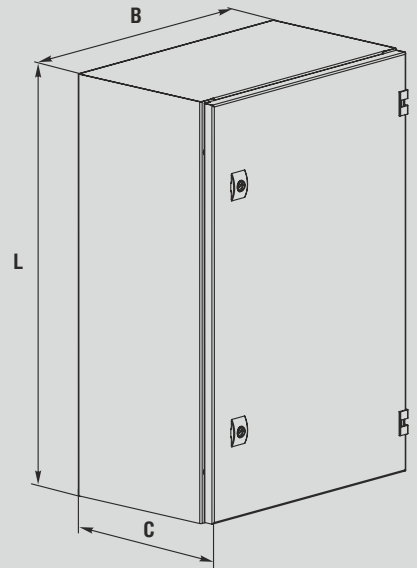

## Compact enclosures L66

IP 66

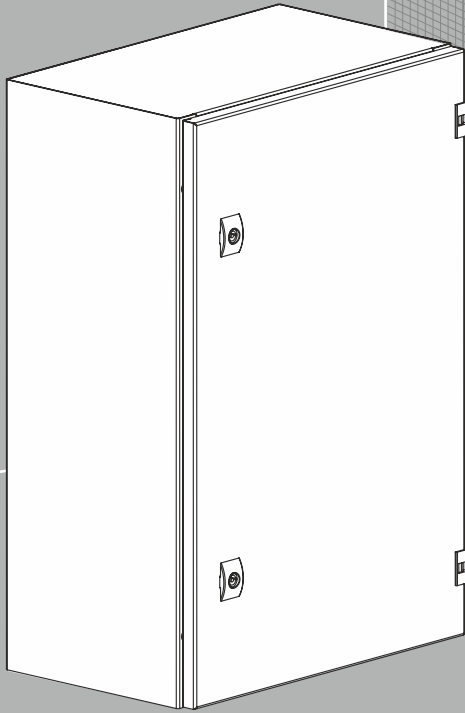

### Technical characteristics

<b>Protection degree:</b>	IP66, IK10
<b>Un, B:</b>	1000
<b>In, A:</b>	100
<b>Load, kg:</b>	100
<b>Type of construction:</b>	welded enclosure
<b>Material:</b>	enclosure, door: sheet steel; mounting plate: sheet steel
<b>Surface:</b>	enclosure: RAL 7035 structured powder coating; mounting plate: galvanized
<b>Sealing:</b>	door and cable entry panel: all-round foamed-in PU seal
<b>Lock:</b>	3 mm double-bit
<b>Hinge:</b>	mounted with 180° opening
<b>Supply includes:</b>	enclosure, mounting plate, door with lock, cable entry panel, grounding set, key, packing
<b>Options:</b>	special coloring, special dimensions
<b>Accessories:</b>	detailed information look <b>System Accessories</b>
<b>Drawing:</b>	page N°100

Height L, mm	Width B, mm	Depth C, mm	Order No.
300	200	180	L66-321
300	300	180	L66-331
300	300	250	L66-332
300	400	250	L66-342
400	300	180	L66-431
400	300	250	L66-432
400	400	180	L66-441
400	400	250	L66-442
400	400	320	L66-443
400	500	250	L66-452
400	600	250	L66-462
500	400	180	L66-541
500	400	250	L66-542
600	400	180	L66-641
600	400	250	L66-642
600	500	250	L66-652
600	600	180	L66-661
600	600	250	L66-662
600	600	320	L66-663
600	800	320	L66-683
800	600	250	L66-862
800	600	320	L66-863
800	800	250	L66-882
800	800	320	L66-883
1000	600	320	L66-1063
1000	800	250	L66-1082
1000	800	320	L66-1083
1200	600	320	L66-1263
1200	800	320	L66-1283
1200	600	420	L66-1264
1200	800	420	L66-1284
1400	600	320	L66-1463
1400	800	320	L66-1483

