




## Compact enclosures LV55

IP  
55

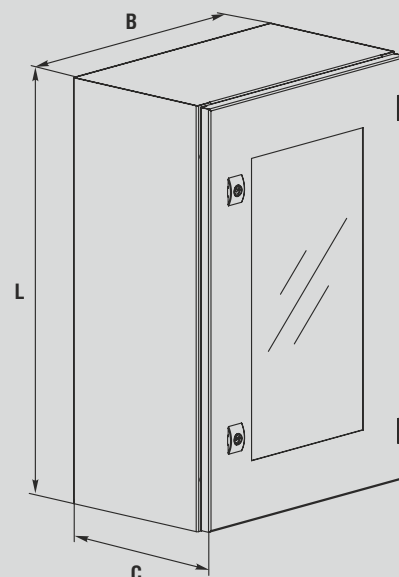

### Technical characteristics

<b>Protection degree:</b>	IP55, IK08
<b>Un, B:</b>	1000
<b>In, A:</b>	100
<b>Load, kg:</b>	100
<b>Type of construction:</b>	welded enclosure
<b>Material:</b>	enclosure: sheet steel; door: sheet steel with glass; mounting plate: sheet steel
<b>Surface: enclosure:</b>	RAL 7035 structured powder coating; mounting plate: galvanized
<b>Sealing:</b>	door and cable entry panel: all-round foamed-in PU seal
<b>Lock:</b>	3 mm double-bit
<b>Hinge:</b>	mounted with 180° opening
<b>Supply includes:</b>	enclosure, mounting plate, door with lock, cable entry panel, grounding set, key, packing
<b>Options:</b>	special coloring, special dimensions
<b>Accessories:</b>	detailed information look <b>System Accessories</b>
<b>Drawing:</b>	page №102

Height L, mm	Width B, mm	Depth C, mm	Order No.
400	300	180	<b>LV55-431</b>
400	300	250	<b>LV55-432</b>
400	400	250	<b>LV55-442</b>
400	400	320	<b>LV55-443</b>
400	500	250	<b>LV55-452</b>
400	600	250	<b>LV55-462</b>
500	400	250	<b>LV55-542</b>
600	400	250	<b>LV55-642</b>
600	500	250	<b>LV55-652</b>
600	800	320	<b>LV55-683</b>
800	600	250	<b>LV55-862</b>
800	600	320	<b>LV55-863</b>
800	800	250	<b>LV55-882</b>
800	800	320	<b>LV55-883</b>
1000	600	320	<b>LV55-1063</b>
1000	800	320	<b>LV55-1083</b>
1200	600	320	<b>LV55-1263</b>
1200	800	320	<b>LV55-1283</b>
1200	600	420	<b>LV55-1264</b>
1200	800	420	<b>LV55-1284</b>

