




Power distribution enclosures from stainless steel XLS55

INOX
AISI 304

IP
55

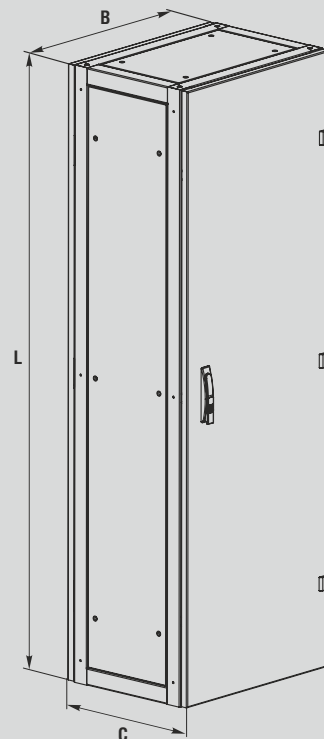

Technical characteristics

Protection degree:	IP55, IK10
Un, B:	1000
In, A:	2500
Load, kg:	800
Type of construction:	welded framework of steel frames
Material:	framework, door, walls: stainless steel AISI 304
Surface:	framework, door, walls: brushed, grain 180
Sealing:	all-round foamed-in PU seal
Lock:	3 mm double-bit
Hinge:	mounted with 120° opening
Supply includes:	framework with roof panel, door with lock, back wall, side walls, grounding set, key, packing
Options:	special dimensions, AISI 316L
Accessories:	detailed information look System Accessories
Drawing:	page N°88

Height L, mm	Width B, mm	Depth C, mm	Order No.
1400	600	400	XLS55-1464
1400	600	600	XLS55-1466
1400	800	600	XLS55-1484
1400	800	600	XLS55-1886
1600	600	400	XLS55-1664
1600	600	600	XLS55-1666
1600	800	400	XLS55-1684
1600	800	600	XLS55-1686
1800	600	400	XLS55-1864
1800	600	600	XLS55-1866
1800	800	400	XLS55-1884
1800	800	600	XLS55-1886
2000	600	400	XLS55-2064
2000	600	600	XLS55-2066
2000	800	400	XLS55-2084
2000	800	600	XLS55-2086

