



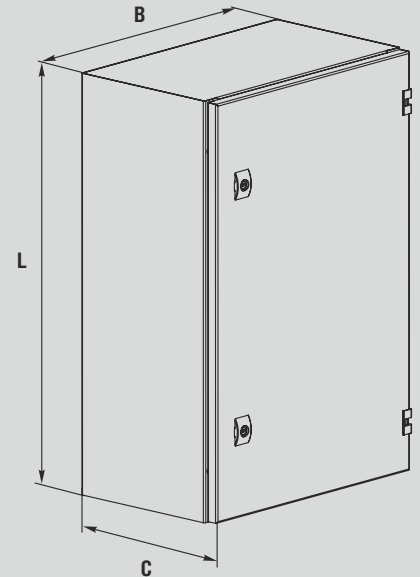

Compact enclosures from stainless steel LS66

INOX
AISI
304

IP
66

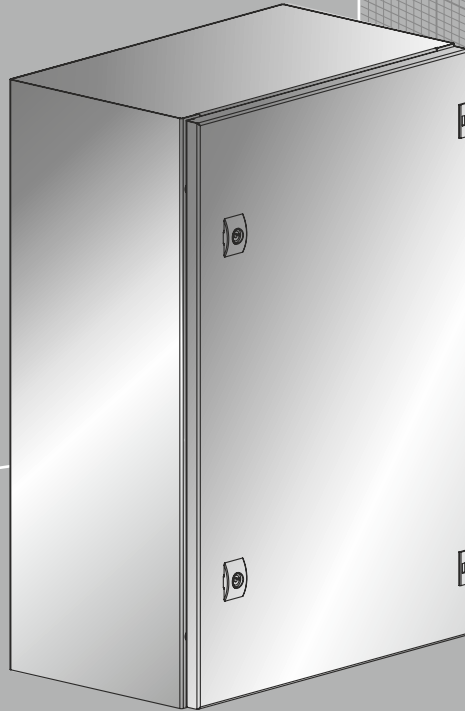

Technical characteristics

Protection degree:	IP66, IK10
Un, B:	1000
In, A:	100
Load, kg:	100
Type of construction:	welded enclosure
Material:	enclosure, door: stainless steel; mounting plate: sheet steel
Surface:	enclosure and door: brushed, grain 180; mounting plate: galvanized
Sealing:	all-round foamed-in PU seal
Lock:	3 mm double-bit
Hinge:	mounted with 180° opening
Supply includes:	enclosure, mounting plate, double leaf door with lock, grounding set, key, packing
Options:	special dimensions, AISI 316L
Accessories:	detailed information look System Accessories
Drawing:	page N°100

Height L, mm	Width B, mm	Depth C, mm	Order No.
300	200	180	LS66-321
300	300	180	LS66-331
300	300	250	LS66-332
300	400	250	LS66-342
400	300	180	LS66-431
400	300	250	LS66-432
400	400	180	LS66-441
400	400	250	LS66-442
400	400	320	LS66-443
400	500	250	LS66-452
400	600	250	LS66-462
500	400	180	LS66-541
500	400	250	LS66-542
600	400	180	LS66-641
600	400	250	LS66-642
600	500	250	LS66-652
600	600	180	LS66-661
600	600	250	LS66-662
600	600	320	LS66-663
600	800	320	LS66-683
800	600	250	LS66-862
800	600	320	LS66-863
800	800	250	LS66-882
800	800	320	LS66-883
1000	600	320	LS66-1063
1000	800	250	LS66-1082
1000	800	320	LS66-1083
1200	600	320	LS66-1263
1200	800	320	LS66-1283
1200	600	400	LS66-1264
1200	800	400	LS66-1284
1400	600	320	LS66-1463
1400	800	320	LS66-1483

