


Side walls XL55-SB

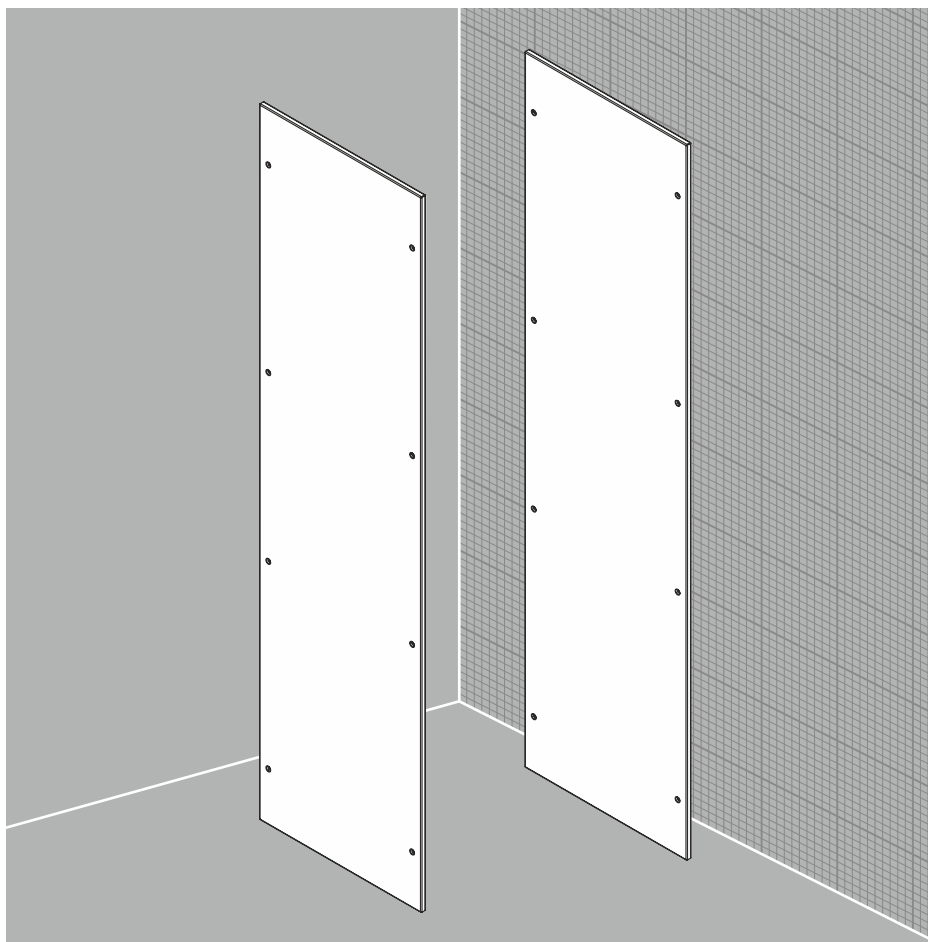

Order No.	Dimensions (enclosure)		Dimensions (wall)		Weight, kg	Packaging unit, piece
	Height, mm	Depth, mm	L, mm	C, mm		
XL55-SB144	1400	400	1296	296	7,48	2
XL55-SB146	1400	600	1296	496	11,91	2
XL55-SB164	1600	400	1496	296	8,59	2
XL55-SB166	1600	600	1496	496	13,69	2
XL55-SB184	1800	400	1696	296	9,72	2
XL55-SB186	1800	600	1696	496	15,46	2
XL55-SB188	1800	800	1696	696	21,21	2
XL55-SB204	2000	400	1896	296	10,82	2
XL55-SB206	2000	600	1896	496	17,24	2
XL55-SB208	2000	800	1896	696	23,67	2
XL55-SB224	2200	400	2096	296	11,97	2
XL55-SB226	2200	600	2096	496	19,01	2
XL55-SB228	2200	800	2096	696	26,10	2

Technical characteristics

Protection degree:	IP55
Material:	sheet steel
Surface:	powder-coated RAL 7035
Sealing:	all-round foamed-in PU seal
Supply includes:	side walls, grounding set, mounting set, package

