



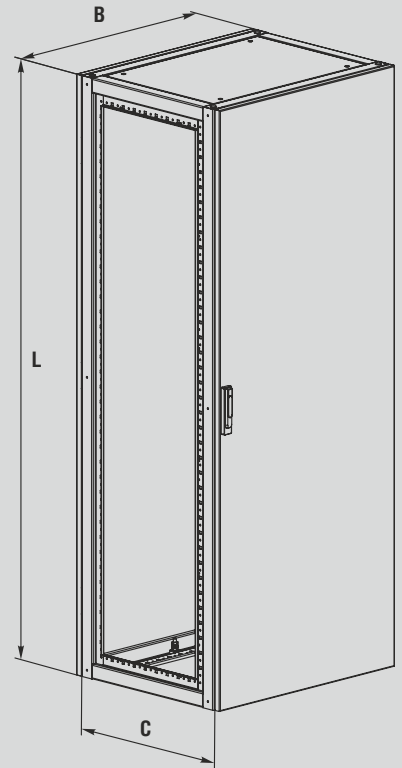

Power distribution enclosures XL55

IP
55

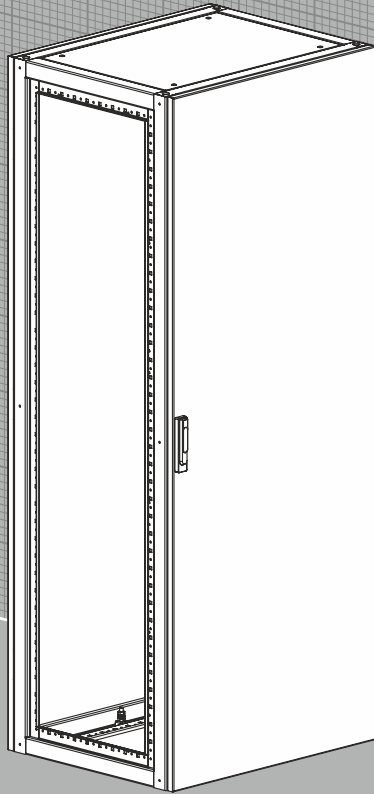

Technical characteristics

- Protection degree:** IP55, IK10
- Un, B:** 1000
- In, A:** 2500
- Load, kg:** 800
- Type of construction:** welded framework of steel frames
- Material:** framework: sheet steel;
door: sheet steel;
walls: sheet steel
- Surface:** framework, door and walls: RAL 7035
structured powder coating
- Sealing:** door, walls, roof panel: all-round
foamed-in PU seal
- Lock:** 3 mm double-bit
- Hinge:** mounted with 120° opening.
- Supply includes:** framework with roof panel, door with
lock, back wall, grounding set, key,
packing.
- Options:** special coloring, special dimensions
- Accessories:** detailed information look
System Accessories
- Drawing:** page №88

Height L, mm	Width B, mm	Depth C, mm	Order No.
1400	600	400	XL55-1464
1400	600	600	XL55-1466
1400	800	400	XL55-1484
1400	800	600	XL55-1486
1600	600	400	XL55-1664
1600	600	600	XL55-1666
1600	800	400	XL55-1684
1600	800	600	XL55-1686
1800	600	400	XL55-1864
1800	600	600	XL55-1866
1800	800	400	XL55-1884
1800	800	600	XL55-1886
1800	800	800	XL55-1888
2000	400	400	XL55-2044
2000	400	600	XL55-2046
2000	600	400	XL55-2064
2000	600	600	XL55-2066
2000	600	800	XL55-2068
2000	800	400	XL55-2084
2000	800	600	XL55-2086
2000	800	800	XL55-2088
2200	600	400	XL55-2264
2200	600	600	XL55-2266
2200	800	400	XL55-2284
2200	800	600	XL55-2286
2200	800	800	XL55-2288

