



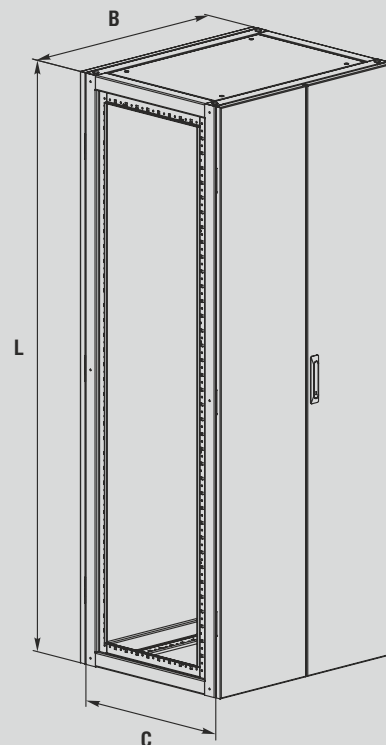

# Power distribution enclosures XLD55

IP 55

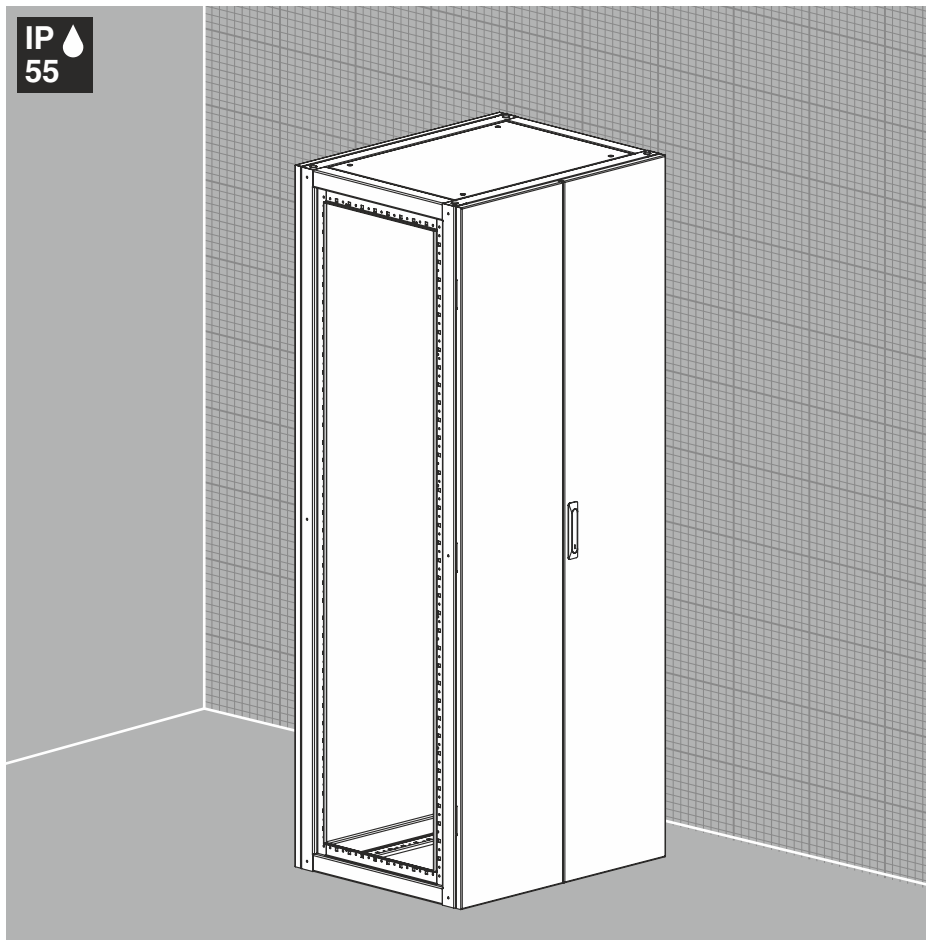

## Technical characteristics

- Protection degree:** IP55, IK10
- Un, B:** 1000
- In, A:** 2500
- Load, kg:** 800
- Type of construction:** welded framework of steel frames
- Material:** framework: sheet steel;  
door: sheet steel;  
walls: sheet steel
- Surface:** framework, door and walls:  
RAL 7035 structured powder coating
- Sealing:** door, walls, roof panel: all-round  
foamed-in PU seal
- Lock:** 3 mm double-bit
- Hinge:** mounted with 120° opening
- Supply includes:** framework with roof panel, double leaf  
door with lock, back wall, grounding  
set, key, packing
- Options:** special coloring, special dimensions
- Accessories:** detailed information look  
**System Accessories**
- Drawing:** page №90

Height L, mm	Width B, mm	Depth C, mm	Order No.
1800	1000	400	XLD55-18104
1800	1000	600	XLD55-18106
1800	1000	800	XLD55-18108
1800	1200	400	XLD55-18124
1800	1200	600	XLD55-18126
1800	1200	800	XLD55-18128
2000	1000	400	XLD55-20104
2000	1000	600	XLD55-20106
2000	1000	800	XLD55-20108
2000	1200	400	XLD55-20124
2000	1200	600	XLD55-20126
2000	1200	800	XLD55-20128
2200	1000	400	XLD55-22104
2200	1000	600	XLD55-22106
2200	1000	800	XLD55-22108
2200	1200	400	XLD55-22124
2200	1200	600	XLD55-22126
2200	1200	800	XLD55-22128

